


FLEXI-E 2,5

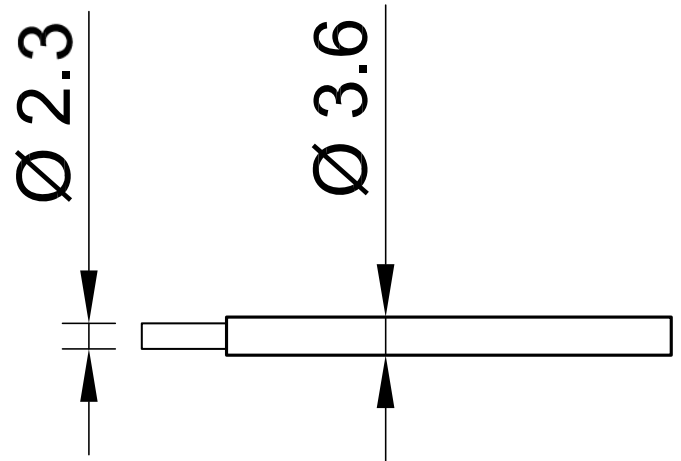

Item number 60.7012-*

Highly flexible basic insulated stranded wire 2,5 mm².

Technical data	
Rated Values	AC 750 V, 32 A
Standard color(s) *	20 21 22 23 24 25
Lead insulation	PVC
Temperature range	-10 °C ... +70 °C
Strand design (n x Ø mm)	651 x 0,07
Lead weight	32.0 kg/km
Conductor diameter	2.3 mm
Cable diameter	3.6 mm
Insulation thickness	0.65 mm
Approvals	CE, UKCA, EAC