


FLEXI-2V 1,0

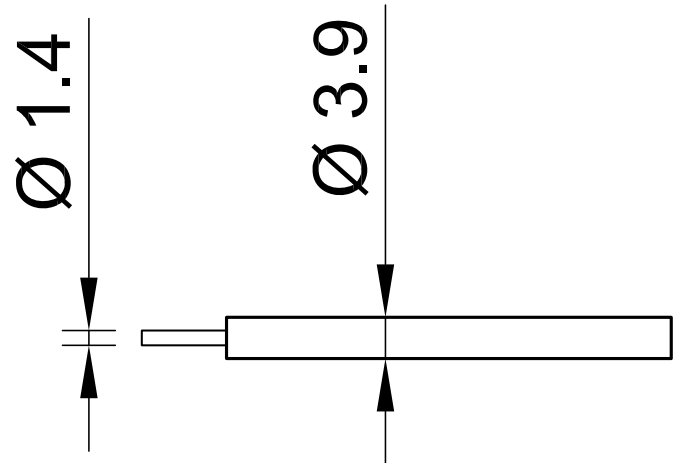

Item number 60.7030-*

Highly flexible stranded wire 1,0 mm² with reinforced, double-layer insulation for the highest safety

| Technical data | |
|--------------------------|-----------------------------------|
| Rated Values | AC 1000 V, 19 A / DC 1500 V, 19 A |
| Standard color(s) * | 21 22 23 24 25 26 27 29 |
| Lead insulation | PVC |
| Temperature range | -10 °C ... +70 °C |
| Strand design (n x Ø mm) | 259 x 0,07 |
| Lead weight | 23.0 kg/km |
| Conductor diameter | 1.4 mm |
| Cable diameter | 3.9 mm |
| Insulation thickness | 1.25 mm |
| Approvals | UR, CE, UKCA, EAC |